

End Fixing


For attachment to a variety of substrates using suitable fixings.

FEATURES / BENEFITS


- Ideal for use with Gripple concrete screws for direct soffit mounting
- Available in sizes No.1, No.2 and No.3 with up to a 5:1 safety factor
- Comes as a ready-to-use kit with Gripple wire rope and hanger
- Available in lengths from 1 m to 10 m (other lengths available upon request)
- Independently certified
- Fire rated version available




INSTALLATION



Drill hole in substrate




Position eyelet over drilled hole



Screw bolt, or shot fire onto cavity to hold position

SPECIFICATION

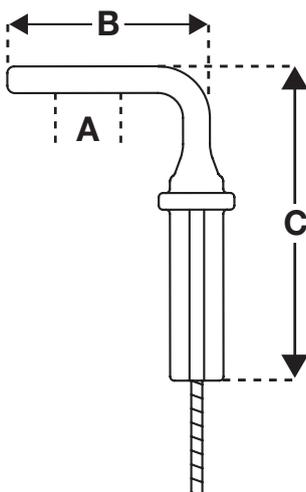

Size	A (mm)	B (mm)	C (mm)
No.1	7.5	25	38
No.2	7.5	25	38
No.3	7.5	25	38

SUBMITTAL INFORMATION

Safe Working Load:

Refer to hanger load ratings and safe working loads.


Material:

Steel
Finish – Bright zinc plated

Approvals:

Lloyds certified and third party fire tested

AVAILABLE HANGERS

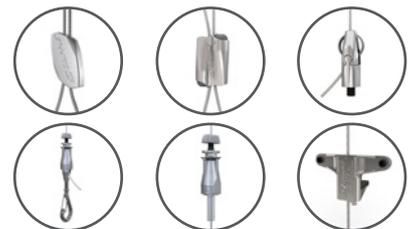

For more options on available hangers please contact us or visit www.gripple.com

IMPORTANT RECOMMENDATIONS

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Gripple Ltd. The responsibility for judgement of base material strength lies with the installer, and not with Gripple Ltd.
2. Not to be used in marine, coastal or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the user's responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. Whilst Gripple Ltd can give general guidance and advice, the nature of Gripple products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripple Ltd.

PI-EYELET-90-ENG-1536

www.gripple.com

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.



Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ
Tel 0800 018 4264 Fax 0114 275 1155 Email info@gripple.com