

Catenary Wall Bracket




Ideal for attaching a 6 mm or 3 mm catenary (CTI) kit from a concrete wall or wooden beam.

FEATURES / BENEFITS


- Available in 100 mm x 100 mm for concrete walls and wooden beams
- 4 x 11 mm diameter mounting holes
- 65 mm hole spacing
- 9mm ring for easy wire rope attachment
- Zinc plated finish (minimum 5 μ mm)
- Ready to install



INSTALLATION & ADJUSTMENT

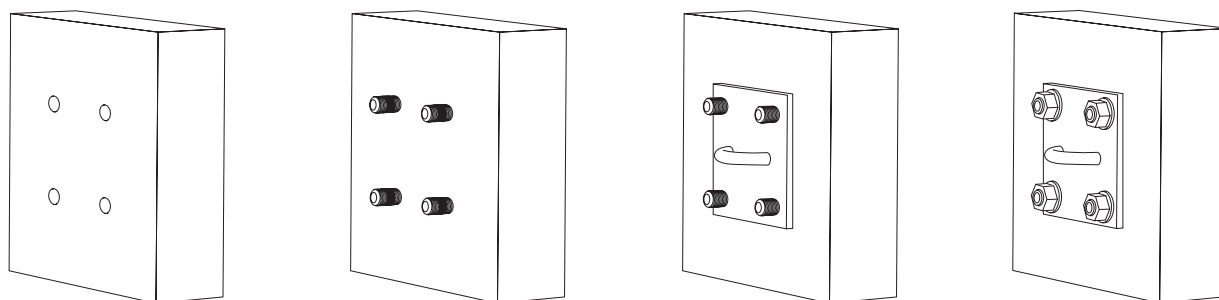

SPECIFICATION

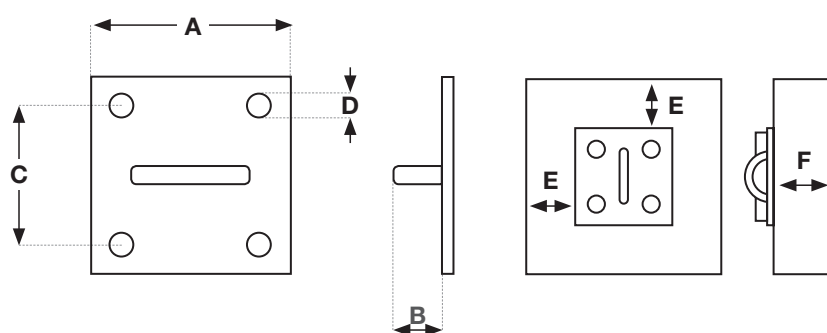

Dimension	(mm)
A	100
B	45
C	65
D	11

Important Recommendations

The minimum distance E and F from the edge of the concrete has to be in line with anchor bolt or screw manufacturer's recommendations.

RELATED PRODUCTS



For more options on suspension methods please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

Load rating: 340 kg with a 3:1 safety factor

Material:

Mild steel

Finish:

Zinc plated finish (minimum 5 μ mm)

