Spreader Band



Accessory

A plastic spreader band for attachment to No.2 and No.3 wire, for spreading the load of various suspended services.


FEATURES / BENEFITS


- Snap to length as required, live hinges allow for flexibility of use
- Suitable for use with 2 mm and 3 mm wire
- Easily installed to wire using integrated clips
- Wire is retained in clip with security latch
- Spreads load of services over wider band
- Ideal for use with insulation, fabric duct and bundled cable
- Supplied in 300 mm lengths
- Multiple units can be used in conjunction for larger diameter duct pipe




INSTALLATION & MOUNTING CONCEPTS


1.







SPECIFICATION

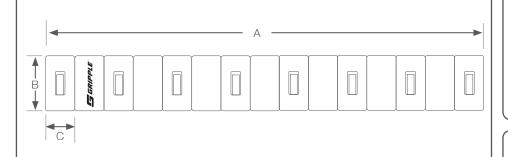

Dimension	mm
А	300
В	40
С	20

SUBMITTAL INFORMATION

Load Rating:

Up to 90 kg at 5:1 safety factor Suitable for use with No.2 and No.3 wire

Material:

Polypropylene

Colour:

Black as standard (other options available on request)

IMPORTANT INFORMATION

- 1. The information and recommendations given herein are believed to be correct at time of writing The data has been obtained from tests done under laboratory, or other controlled conditions and it is the users responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
- 2. Whilst Gripple Ltd can give general guidance and advice, the nature of Gripple products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
- 3. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripple Ltd.

PI-SPREADERBAND-ENG-EU

etc. without notice.

www.gripple.com

Gripple's policy is one of continuous development and















